


Ultra-Low Capacitance ESD/Surge Protection

SE02P8M14HA

Features

- ◆ Package optimized for high-speed lines
- ◆ Low capacitance: 1.5pF @ 3.0V (Typical)
- ◆ Low leakage current: 0.1uA @ V_{RWM} (Typical)
- ◆ Low operating and clamping voltage

Circuit Diagram

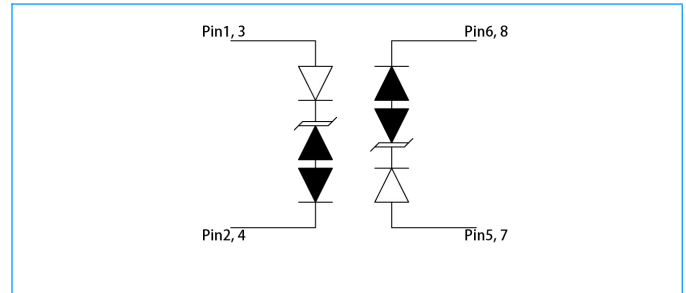


Applications

- ◆ 10/100M Ethernet Ports
- ◆ WAN/LAN Equipment
- ◆ Desktops, Servers and Notebooks
- ◆ Cellular Phones

Mechanical Characteristics

- ◆ MSOP-8 package
- ◆ Flammability Rating: UL 94V-0
- ◆ Marking: Part number
- ◆ Quantity Per Reel: 3,000 pcs
- ◆ Reel size: 13 inch
- ◆ Marking Code: S2814VXXXX

Pin Configuration

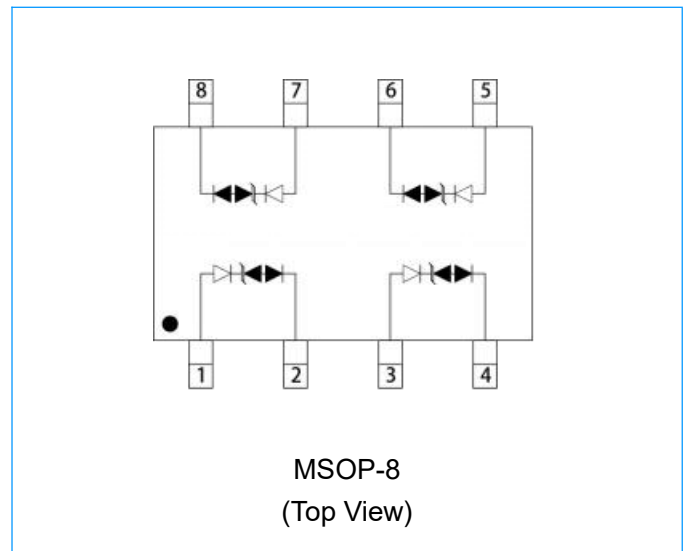

Absolute Maximum Rating


Symbol	Parameter	Value	Units
V_{ESD}	ESD per IEC 61000-4-2(Air) ESD per IEC 61000-4-2 (Contact)	± 30 ± 30	KV
T_{OPT}	Operating Temperature	-55to+125	°C
T_{STG}	Storage Temperature	-55to+150	°C
T_{LST}	Lead Soldering Temperature	260(10sec.)	°C

Ultra-Low Capacitance ESD/Surge Protection

SE02P8M14HA

Electrical Parameters (T = 25°C)

Symbol	Parameter
V_{RWM}	Nominal Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{t1}	Trigger Voltage
I_{t1}	Trigger Current @ V_{t1}
V_h	Holding Voltage
I_h	Holding Current @ V_h
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Maximum Peak Pulse Current
V_{BR}	Breakdown Voltage @ I_T
C_J	Parasitic Capacitance

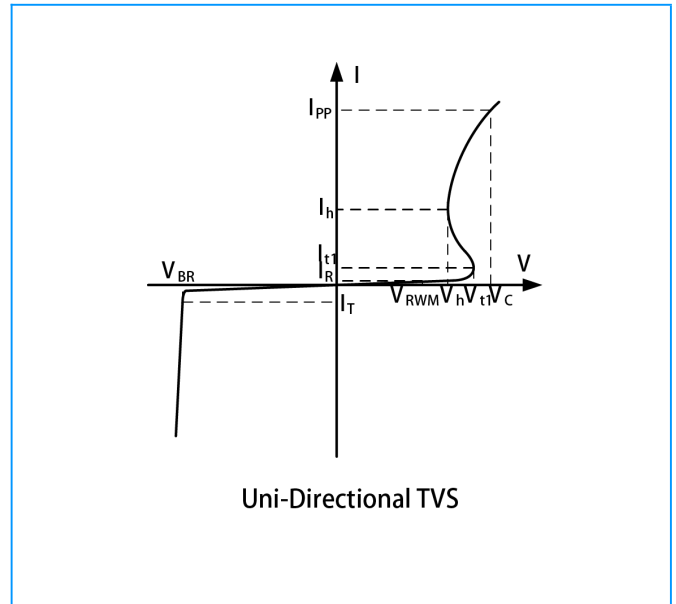

Electrical Characteristics (T_c=25°C, unless otherwise noted)

Symbol	Test Condition	Minimum	Typical	Maximum	Unit
V_{RWM}	--	--	--	2.8	V
I_R	$V_{RWM}=2.8V, T=25^{\circ}C$	--	0.1	1.0	μA
V_{t1}	$I_{t1}=100\mu A$	3.0	3.7	4.5	V
V_h	$I_h=10mA$	3.0	--	4.0	V
V_C	$I_{PP}=2A, tp=8/20\mu s$ (Each Line)	--	--	5.0	V
V_C	$I_{PP}=10A, tp=8/20\mu s$ (Each Line)	--	--	8.0	V
V_C	$I_{PP}=24A, tp=8/20\mu s$ (Each Line)	--	--	14.0	V
C_J	$V_R=3.0V, f=1MHz$ (Each Line)	--	1.5	2.5	pF

Ultra-Low Capacitance ESD/Surge Protection

SE02P8M14HA

Characteristic Curves

Fig1. 8/20μs Pulse Waveform

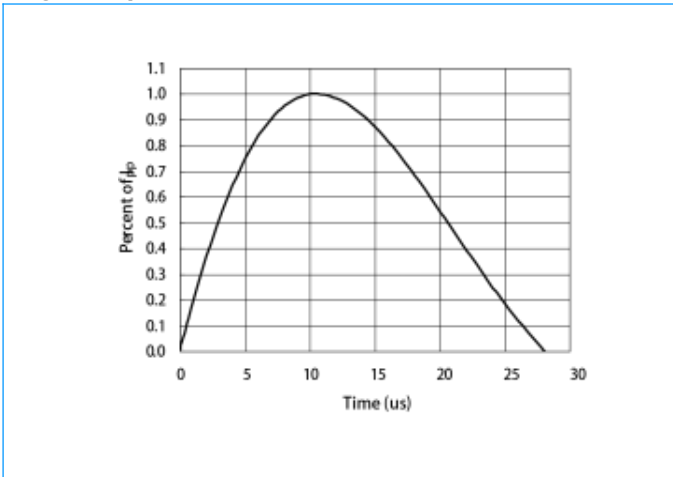


Fig2. Clamping Voltage V_C vs. Current I_{PP}

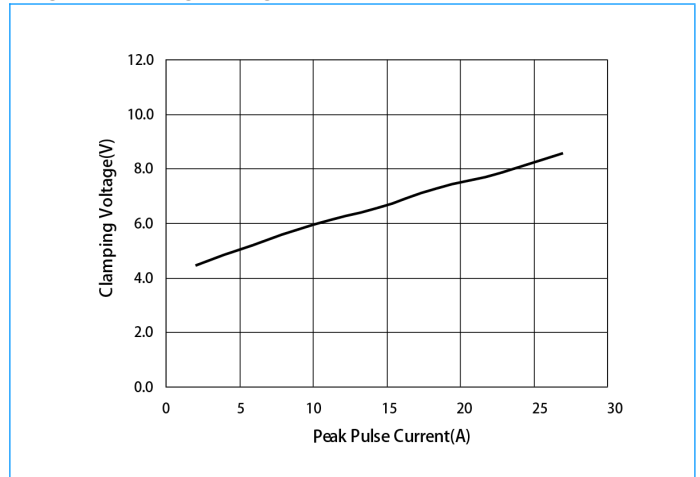


Fig3. ESD Clamping of I/O to GND
(+8kV Contact per IEC 61000-4-2)


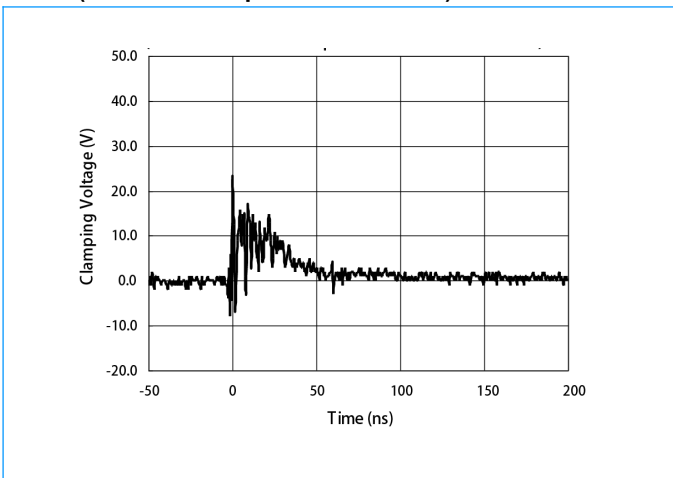


Fig4. Normalized Capacitance vs. Voltage

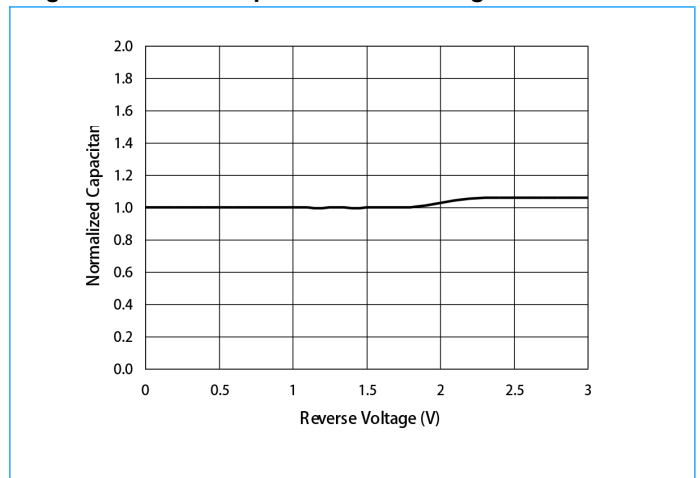


Ultra-Low Capacitance ESD/Surge Protection

SE02P8M14HA


Package Outline and Dimensions

MSOP-8 Package

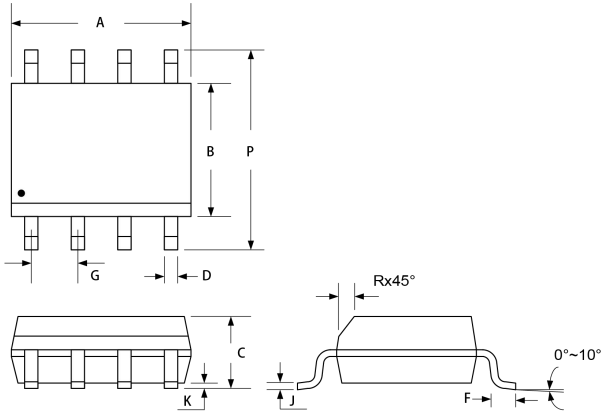


Symbol	Millimeters		Inches	
	Minimum	Maximum	Minimum	Maximum
A	4.800	5.000	0.189	0.196
B	3.800	4.000	0.150	0.157
C	1.350	1.750	0.054	0.068
D	0.350	0.490	0.014	0.019
F	0.400	1.250	0.016	0.049
G	1.27 BSC.		0.05 BSC.	
J	0.180	0.250	0.007	0.009
K	0.100	0.250	0.004	0.008
P	5.800	6.200	0.229	0.244
R	0.250	0.500	0.010	0.019

Tape and Reel Specification

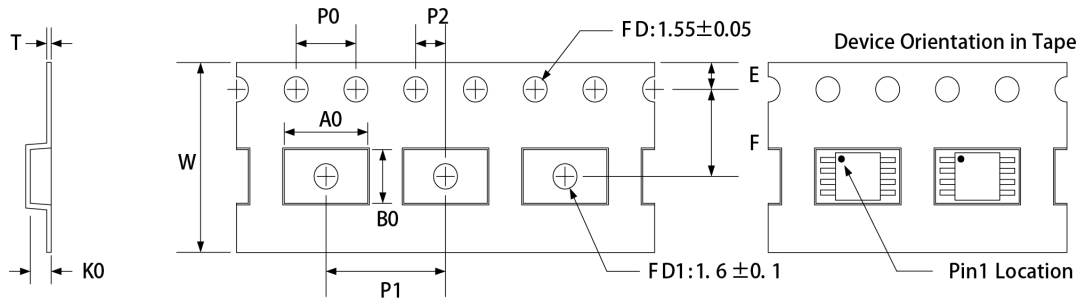

Symbol	W	A1	B0	K0	E	F	P1	P0	P2	T
Dimensions (mm)	12.00±0.3	6.40±0.1	5.2±0.1	2.10±0.1	1.75±0.1	5.50±0.1	8.0±0.1	4.0±0.1	2.0±0.1	0.3±0.05

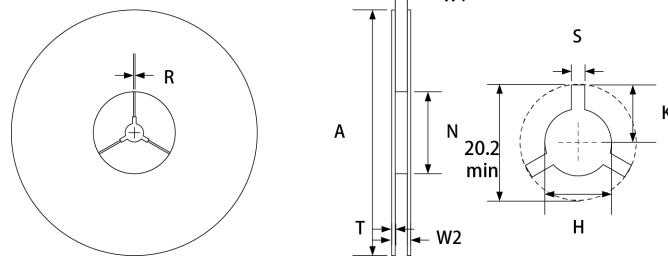

Symbol	Reel Size	M	N	W	W1	H	T	S	K	R
Dimensions (mm)	Φ330	330.0±2.0	100.0±2.0	18.4 max.	12.4+2.0/-0.0	13.0+0.5/-0.2	2.0±0.2	1.5 min.	10.1 min.	2.5 min.