




# SV0805N5R5G0A

## Description

The SV0805N5R5G0A is based on Multilayer fabrication technology. These components are designed to suppress a variety of transient events, including those specified in IEC 61000-4-2 or other standards used for Electromagnetic Compliance (EMC). The SV0805N5R5G0A is typically applied to protect integrated circuits and other components at the circuit board level. It can operate over a wider temperature range than zener diodes.

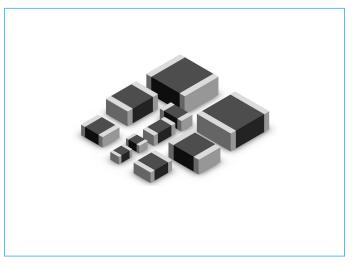

#### **Features**

- Rectangle, sizes serialization for hybrid integrated circuit or printed circuit surface mount components
- There are many side electrode lead-out material, particularly suitable for surface mount technology for solderability and resistance to soldering heat of the stringent requirements
- Fast response (<1ns)</li>
- Low leakage current, low clamping voltage
- Suitable for reflow, wave soldering and hot air hand soldering

### Applications

- Application for Mother Board, Notebook, Cellular Phone, PDA, handheld device, DSC, DV, Scanner, and Set- Top Box...etc.
- Suitable for Push-Button, Power Line and Low Frequency single line over-voltage protect.

www.socay.com





## SV0805N5R5G0A

### Electrical Characteristics (25±5°C)

Symbol	Minimum	Typical	Maximum	Units
V <sub>RMS</sub>	_	_	4	V
VDC	_	_	5.5	V
Vv	6.6	_	9.9	V
Vc	_	_	21	V
I <sub>max</sub>	_	_	50	А
W <sub>max</sub>	_	_	0.2	J

 $V_{RMS}$  - Maximum AC operating voltage the varistor can maintain and not exceed 10µA leakage current.

 $V_{DC}$  - Maximum DC operating voltage the varistor can maintain and not exceed 10µA leakage current.

- $V_V$  Voltage across the device measure at 1mA DC current. Equivalent to V<sub>B</sub> "breakdown voltage".
- Vc Maximum peak current across the varistor with 8/20µs waveform and 2A pulse current.

Imax - Maximum peak current which may be applied with 8/20µs waveform without device failure.


 $W_{max}$  - Maximum energy which may be dissipated with the 10/1000µs waveform without device failure.





# SV0805N5R5G0A

#### **Dimensions**




Size EIA	Leng	th (L)	Widtl	h (W)	Thickness (T)		
(EIAJ)	Inches Millimeters		Inches	Millimeters	Inches	Millimeters	
0805 (2012)	0.079±0.008	2.00±0.20	0.049±0.008	1.25±0.20	0.055 Max	1.40 Max	

#### Soldering Recommendations

#### • Recommended solder Pad Layout

Size EIA	A Size EIA		E	В		;	D		
(EIAJ)	Inches	Millimeters	Inches	Millimeters	Inches	Millimeters	Inches	Millimeters	
0805 (2012)	0.039~0.059	1.0~1.5	0.126~0.150	3.2~3.8	0.047~0.055	1.2~1.4	0.012~0.024	0.3~0.6	

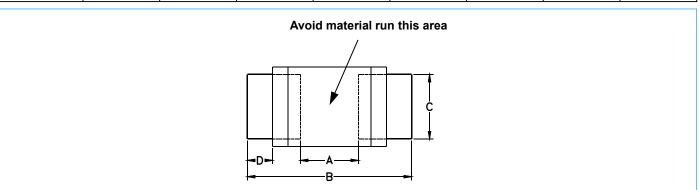

- The solder paste shall be printed in a thickness of 150 to 200µm.
- The SIR test of the solder paste shall be done (Base on JIS-Z-3284)

#### IR Soldering


Rapid heating, partial heating or rapid cooling will easily cause defect of the component. So preheating and gradual cooling process is suggested. IR soldering has the highest yields due to controlled heating rates and solder liquidus times. Make sure that the element is not subjected to a thermal gradient steeper than 4 degrees per second. 2 degrees per second is the ideal gradient. During the soldering process, pre-heating to within 100 degrees of the solder peak temperature is essential to minimize thermal shock.





# SV0805N5R5G0A

## Soldering Recommendations (Continue)

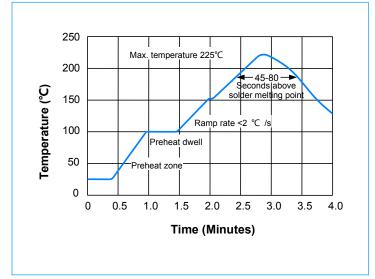

#### (a) Preheat

- 1. The temperature rising speed is suggested to be 2~4  $^\circ\!C$  /s
- 2. Appropriate preheat time will be from 60 to 120 seconds.


#### (b) Heating

- 1. Careful about sudden rise in temperture as it may worser the solder ability.
- 2. Set the peal temperature in the range from 215 °C to 225 °C.

#### (c) Cooling

1. Careful about slow cooling as it may cause the position shift of component.

## Surge Waveform

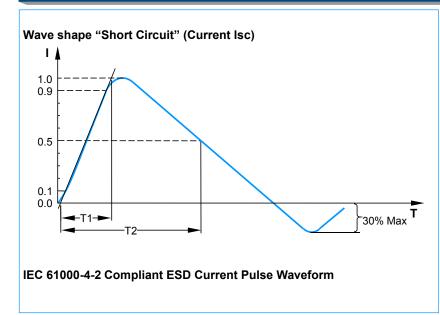

### IEC61000-4-5 Standards

SEVERITY LEVEL	T1	T2	
1	8µs	20µs	
2	10µs	1000µs	

## SOCAY Electronics Corp., Ltd.

Please refer to www.socay.com for current information.

www.socay.com



BHF RoHS

# Surface Mount Multilayer Varistor

# SV0805N5R5G0A

## **Environmental & Reliability Testing**

Characteristic	Test method and description							
High Temperature Storage	The specimen shall be subjected to125±2°C for 1000±2 hours in a thermostatic bath without loand then stored at room temperature and humidity for 1 to 2 hours. The change of varistor voltage shall be within 10%.							
		Step	Temperture	Period				
Temperature Cycle	The temperature cycle of specified temperature shall be repeated five times and then stored at room	1	<b>-40±3</b> ℃	30min±3				
	temperature and humidity for one two hours. The	2	Room Temperature	1~2hours				
	change of varistor voltage shall be within 10% and mechanical damage shall be examined.	3	<b>125±2</b> ℃	30min±3				
	-	4	Room Temperature	1~2hours				
High Temperature Load	After being continuously applied the maximum allo specimen shall be stored at room temperature and hu voltage shall be within 10%.		•					
Damp Heat Load/ Humidity Load	The specimen should be subjected to $40^{\circ}$ C,90 to 95%RH environment, and the maximum allowable voltage applied for 1000 hours, then stored at room temperature and humidity for one o two hours. The change of varistor voltage shall be within 10%.							
Low Temperature Storage	The specimen should be subjected to -40 $^\circ\!\mathrm{C}$ , without load for 1000 hours and then stored at room temperature for one two hours. The change of varistor voltage shall be within 10%.							

## **General Technical Data**

Operating Temperature	-55~85℃
Storage Temperature	-55~150°C
Response Time	<1 ns
Solderability	245±5℃, 3±1sec
Solder Leach Resistance	260±5℃, 10±1sec






# SV0805N5R5G0A

## **Packaging Information**

#### **Carrier Tape Dimensions**

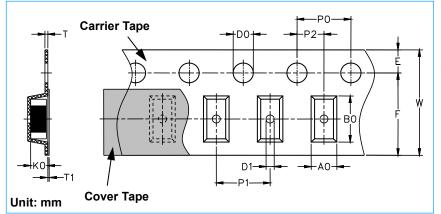


Carrier tape transparent cover tape should be heat-sealed to carry the products, and the reel should be used to reel the carrier tape.

The adhesion of the heat-sealed cover tape shall be 40+20/-15 grams.

Both the head and the end portion of taping shall be empty for reel package and SMT auto-pickup machine. And a normal paper tape shall be connected in the head of taping for the operator handle.

Symbol	A0 ±0.10	В0 ±0.10	K0 ±0.10	T ±0.05	T1 ±0.05	D0 +0.10 -0.00	D1 ±0.05	P1 ±0.10	P2 ±0.05	P0 ±0.050	W ±0.20	E ±0.10	F ±0.05
0805	1.42	2.30	1.04	0.22	0.10	1.50	1.00	4.00	2.00	4.00	8.00	1.75	3.50

#### **Taping Reel Dimensions**



Symbol	А	В	С	D	w	W1
0805	178.0±1.0	60.0±0.5	13.0±0.2	110.0±0.5	9.0±0.5	1.5±0.15

#### **Taping Specifications**

There Shall be the portion having no product in both the head and the end of taping, and there shall be the cover tape in the heat of taping.

#### Quantity of products in the taping package

SIZE EIA (EIAJ)	0805 (2012)
Standard Packing Quantity (PCS / reel)	3,000

The contents of a box : 0805 Series: 6 reels / inner box

#### Label and Marking:

The paper label shall be plastered on the obvious side of the reel, and the information show as right side

## SOCAY Electronics Corp., Ltd.

www.socay.com